


UNIT D UPPER LEVEL PLAN  
SCALE: 3/16" = 1'-0"

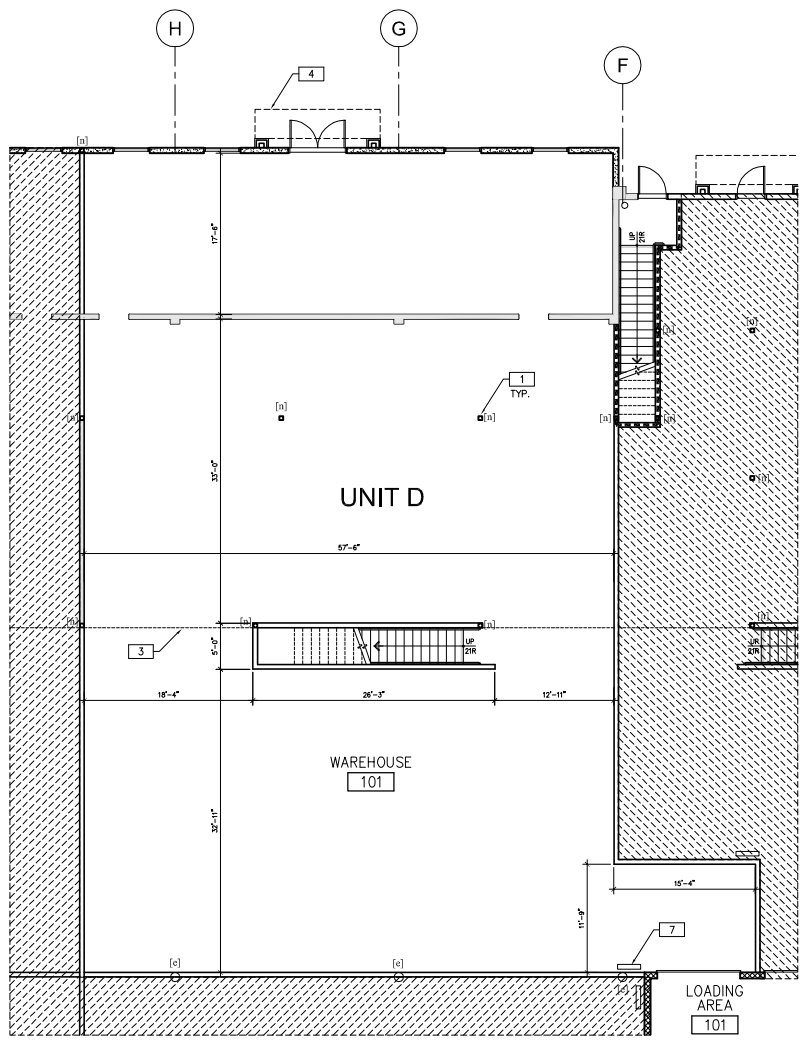

UNIT D LOWER LEVEL PLAN  
SCALE: 3/16" = 1'-0"

### FLOOR PLAN GENERAL NOTES

1. ALL DIMENSIONS ARE TO FACE OF CURB, FACE OF CONCRETE OR MASONRY, FACE OF FRAMING OR CENTERLINE OF GRID UNLESS NOTED OTHERWISE.
2. FINISH FLOOR ELEVATIONS ARE TO TOP OF CONCRETE, UNLESS NOTED OTHERWISE.
3. GENERAL CONTRACTOR SHALL MAINTAIN THE JOB SITE IN A CLEAN AND ORDERLY CONDITION, FREE OF DEBRIS AND LITTER, UPON COMPLETION. ALL CONTRACTORS SHALL REMOVE THEIR WASH AND SORES FROM THE PREMISES. ALL AREAS TO BE BROOM CLEANED.
4. ALL CONDUIT PIPING IN ELECTRICAL ROOM TO BE CONCEALED WITHIN THE WALL CONSTRUCTION.
5. WHERE ELECTRICAL, MECHANICAL AND/OR PLUMBING ITEMS, SUCH AS LIGHTS, SWITCHES, PANELS, ETC., TO PENETRATE ANY BUILDING FOOTINGS, SLABS, FLOORS, STRUCTURAL FRAMING, WALL PARTITIONS, CEILING, ETC., IT IS REQUIRED THAT AN APPROPRIATELY SIZED OPENING OR CLEANOUT BE FURNISHED. CONTRACTOR SHALL COORDINATE THE INSTALLATION OF ALL ITEMS WITH THE CONSTRUCTION DOCUMENTS PRIOR TO THE INSTALLATION OF STRUCTURAL, MECHANICAL, PLUMBING AND ELECTRICAL WORK. ANY CONFLICT OR DISCREPANCY WITHIN CONSTRUCTION DOCUMENTS SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION FOR CLARIFICATION. ANY WORK INSTALLED IN CONFLICT WITH THE ARCHITECTURAL DRAWINGS SHALL BE CORRECTED BY CONTRACTOR AT NO EXPENSE TO ARCHITECT OR OWNER.
6. DOOR OPENINGS IN PARTITIONS NOT DIMENSIONED ARE TO BE LOCATED WITHIN 4" OF ADJACENT PERPENDICULAR PARTITION. PROVIDE 1" CLEAR AT STRIKE SIDE.
7. ALL INTERIOR PARTITIONS SHALL BE TAPED AND SANDED SMOOTH TO RECEIVE PAINT OR WALL FINISH MATERIAL.
8. USE WATER RESISTANT GYPSUM BOARD AT ALL AREAS SUBJECT TO MOISTURE OR WHERE TILE IS USED.
9. PREPARE ALL FLOOR SURFACES AND WALLS AS REQUIRED TO RECEIVE FINISHES.
10. FURNISH AND INSTALL 16 GAUGE GALVANIZED METAL WALL BACKING AT BUILT-IN MILLWORK, LAVATORIES, DOOR STOPS, HANGING WALL EQUIPMENT, ETC. VERIFY EXACT BACKING LOCATIONS PRIOR TO INSTALLATION.
11. FIELD MEASURE AS REQUIRED FOR ALL DOORS, WINDOWS OPENING AND MILLWORK PRIOR TO FABRICATION.
12. ALL CONSTRUCTION WORK SHALL BE IN ACCORDANCE WITH UNIFORM BUILDING CODE AND LOCAL AMENDMENTS.
13. ALL HOT WATER LINES SHALL BE PROPERLY INSULATED. SEE PLUMBING SCHEDULE.
14. CONTRACTOR SHALL VERIFY SIZE AND LOCATION OF DUCT OPENINGS AND PLUMBING RISERS WITH MECHANICAL. SUB-COORDINATE BEFORE FRAMING OPENINGS IN WALLS, FLOORS, ROOF, ETC.
15. PROVIDE AND LOCATE ACCESS DOORS AND PANELS IN THE WALL AND CEILING CONSTRUCTION AS REQUIRED TO PROVIDE ACCESS TO MECHANICAL, FIRE SPRINKLER PLUMBING AND ELECTRICAL WORK. CONTRACTOR SHALL SUBMIT A PLAN OF ALL PROPOSED LOCATIONS TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.
16. ALL PLUMBING CLEANOUTS SHALL BE INSTALLED WHERE READILY ACCESSIBLE. CONTRACTOR SHALL COORDINATE ALL CLEANOUT LOCATIONS WITH EQUIPMENT AND CABINETS. SUBMIT A PLAN OF ALL PROPOSED LOCATIONS TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.
17. PROVIDE AND INSTALL OFFENSES, BRACING BACK-UP PLATES AND/OR SUPPORTING BRACKETS AS REQUIRED FOR THE INSTALLATION OF WALL MOUNTED OR INSTALLED OFFENSES, BRACING BACK-UP PLATES AND/OR SUPPORTING BRACKETS AS REQUIRED FOR THE INSTALLATION OF WALL MOUNTED OR SUSPENDED MECHANICAL, ELECTRICAL AND MISCELLANEOUS EQUIPMENT.
18. ALL EXITS SHALL HAVE EXIT SIGNS AND ALL BLIND CORRIDOR TURNING SHALL HAVE DIRECTIONAL EXIT SIGNS.
19. REFERENCE PLUMBING, CIVIL, AND SITE PLANS FOR SIZE AND ROUTING OF ROOF DRAINAGE CONNECTION TO UNDERGROUND STORM DRAIN OR RUN TO DAYLIGHT AS SHOWN.
20. REFERENCING INTERIOR FINISH SCHEDULE FOR ALL INTERIOR FINISHES.
21. PROVIDE SOUND INSULATION AT PERIMETER WALLS OF RESTROOMS, LOBBY, STAIRS, AND ACCESS CEILING OF RESTROOMS TO CREATE AN ACOUSTIC ENVELOPE.
22. ALL ENCLOSED PORTIONS OF BUILDINGS CUSTOMARILY OCCUPIED BY HUMAN BEINGS SHALL BE PROVIDED WITH NATURAL VENTILATION BY MEANS OF OPERABLE EXTERIOR OPENINGS WITH AN AREA NOT LESS THAN 1/20 OF THE TOTAL FLOOR AREA OF SUCH ENCLOSED PORTION. SUCH MECHANICALLY OPERATED VENTILATION SYSTEM SHALL BE CAPABLE OF SUPPLYING A MINIMUM OF 15 CUBIC FEET PER MINUTE OF OUTSIDE AIR PER OCCUPANT DURING SUCH TIME AS THE BUILDING IS OCCUPIED. IF THE VELOCITY OF AIR AT A REGISTER EXCEEDS 10 FEET PER SECOND, THE REGISTER SHALL BE PLACED MORE THAN 8 FEET ABOVE THE FLOOR (RECT'S REG-201, SEC. SECTION 1002.2).


### LEGEND

- EXISTING CONCRETE WALL TO REMAIN
- IN-FILL EXISTING WALL OPENING
- EXTERIOR PLASTER WALL OVER METAL STUD
- 4"-0" HIGH CURB WALL WITH 1-HR WOOD STUD FRAMED WALL W/PLASTER FINISH ABOVE CMU TO UNDERSIDE OF DECK
- 4"-0" HIGH CURB WALL WITH 1-HR METAL STUD FRAMED WALL W/PLASTER FINISH ABOVE CMU TO UNDERSIDE OF DECK
- FULL HEIGHT 1-HR RATED PARTITION
- FULL HEIGHT NON-RATED PARTITION TO STRUCTURE
- INTERIOR PARTITION TO 6" ABOVE CEILING
- EXISTING COLUMNS. SEE STRUCTURAL DWGS.
- NEW COLUMN. SEE STRUCTURAL DWGS.

### FLOOR PLAN NOTES

- 1 STRUCTURAL COLUMN. SEE STRUCTURAL DRAWINGS.
- 2 4'-0" X 3'-0" WINDOW WITH 2" THICK GLAZING. INSTALL AT 42" AFF.
- 3 MEZZANINE LINE ABOVE.
- 4 METAL CANOPY ABOVE.
- 5 ROOF ACCESS LADDER.
- 6 EXISTING INSULATED WALL IN-FILL GYPSUM BOARD IN OPEN AREA TO UNDERSIDE OF STRUCTURE.
- 7 ELECTRICAL SWITCHGEAR/EQUIPMENT. SEE ELECTRICAL DRAWINGS.

### KEY PLAN



WARE MALCOMB  
 ARCHITECTURE  
 1382 VALENCIA  
 TUSTIN, CA 92680  
 TEL: 714.261.1500  
 WWW.WAREMALCOMB.COM

M 2 properties  
 VALENCIA BUSINESS CENTER  
 1382 VALENCIA  
 TUSTIN, CALIFORNIA

DRAWN BY: A. VARGAS  
 LOW NO.:  
 SHEET  
 A2.1D